


# SIGN-STAN

LED Sign Light . STAN Series

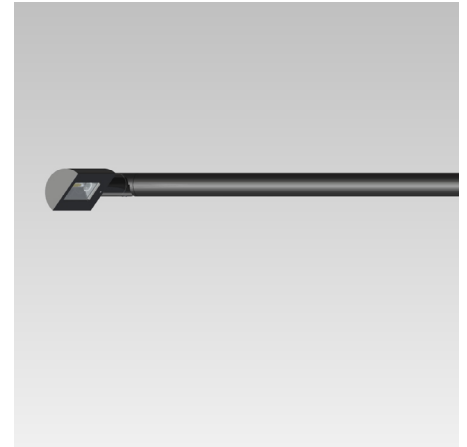

## Product Features

- Compact, modern LED sign light.
- ETL outdoor wet location listed. IP67 standard.
- Adjustable fixture head with flood distribution.
- Machined from solid billet 6061-T6 corrosion resistant aluminum.

## Specification

**Materials:** Machined from billet 6061-T6 corrosion resistant aluminum with 304 stainless steel hardware. Available in 304/316 stainless steel or 360 brass upon request.

**Light Source:** CRI 83. Available in CRI95 upon request. The chromaticity range is within a 3-step McAdam Ellipse. Standard CCT options are 2700K, 3000K, 4000K.

**Finish:** Polyester powder coat on all aluminum materials with RoHS compliant procedures. Anodized finish is available. Stainless steel and brass models are provided with brushed surface.

**Voltage:** 12V AC/DC. Requires remote step down transformer.

**Dimmability:** MLV .

**Wattage:** 4 W HK LED.

## Ordering Guide

EXAMPLE: SIGN-STAN - 12V - 4 - 27 - BK - 12" - CM5


SERIES	MATERIAL	VOLTAGE	WATTAGE	CCT	FINISH	EXTENSION SIZE(L)	OPTIONAL MOUNTING ACCESSORIES
SIGN-STAN		12V					
	BLANK Aluminum(Standard)		4 4W	27 2700K	Standard	12"	See page 2 for quick reference, or "Accessories" link for detailed specification.
	NBR Natural Brass			30 3000K	BK Black Powder Coat	24"	
	NSS Natural Stainless Steel			40 4000K	BZ Bronze Powder Coat	30"	
	CU Natural Copper				WT White Powder Coat		
					Premium		
					ABK Anodized Black		
					ACL Anodized Clear		
					CC Custom Powder Coat		

Remote Step Down Transformer (Optional).  
See "Accessories" link for detailed specification.

Model	Wattage(VA)	Primary Voltage(VAC)	Secondary Volt(VAC)	Dimming Method	Characters
TXM	20 40 60 100 150 300	120 or 277	12	MLV	Outdoor, Wall Mount, Compact
TXS	150 300 600	120	Multi-tap of 12, 13, 14, 15 VAC	MLV	Outdoor, Wall mount, Stainless Steel Case
IGT	50(120V only) 100 300 600	120 or 277	12	MLV	in grade
TXE	60	120, 230, or 277	12	ELV	Needs Enclosure, 6ft working distance



## Product Drawings

NOTE: Specification and dimensions subject to change without notice.

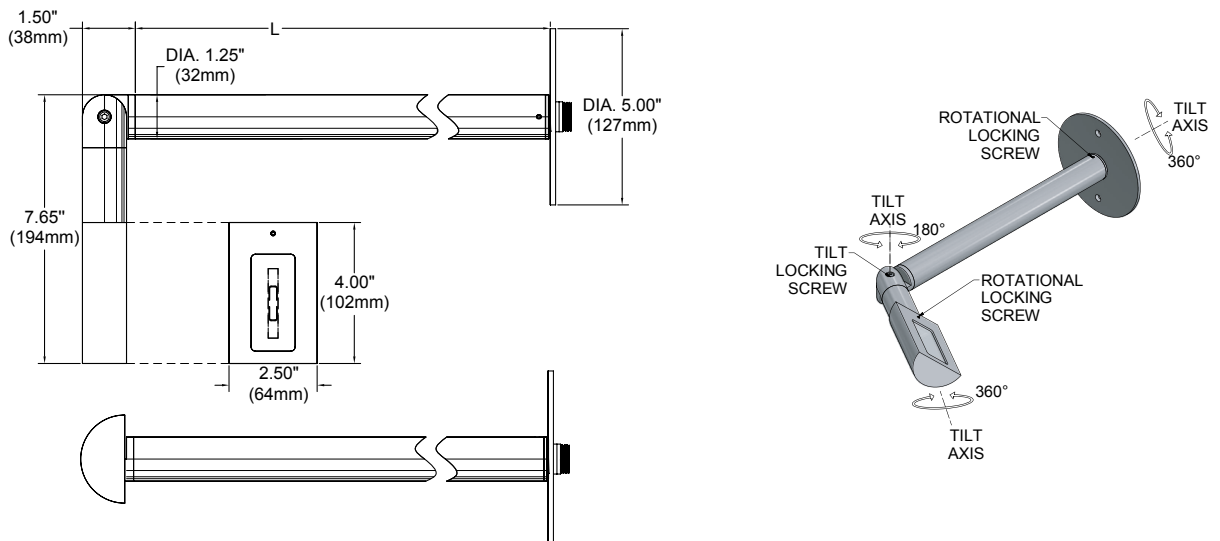

**Photometry & Energy Data** Note: The IES info is taken from ZXLF-8W, please use the multiplier 0.5 for the below info and IES files.

MODEL	ZXLF-8W
Input Power	7.6W
Color Temperature (CCT)	3000K
Color Rendering Index (Ra)	88
Horizontal Beam Angle	100.5°
Vertical Beam Angle	79.8°
Max. Candelperpower	147cd
Delivered Lumen	262lm
Efficacy	34 lm/W

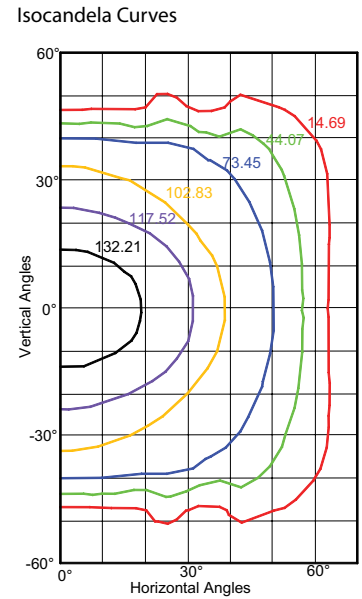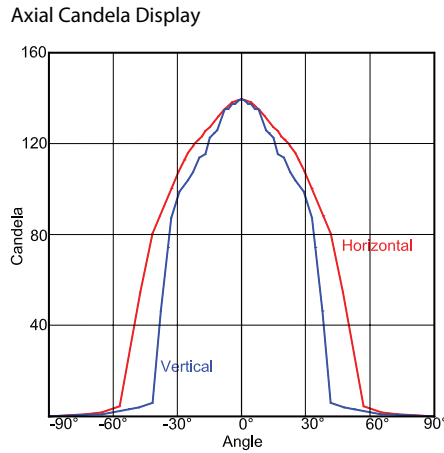


Wattage	Multiplier
4Watt	0.50

Color Temp.	Multiplier
2700K	0.97
3000K	1.00
4000K	1.05

**Mounting Accessories**


Canopy Plate:

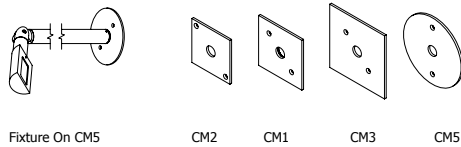

Fixture On CM5

CM2 CM1 CM3 CM5

Surface Mount Box:

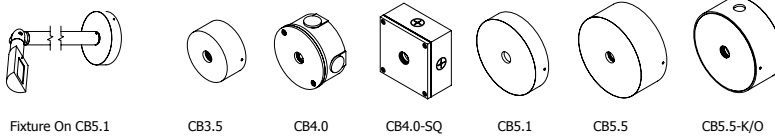

Fixture On CB5.1

CB3.5 CB4.0 CB4.0-SQ CB5.1 CB5.5 CB5.5-K/O

**Notes**